



BT-GB720

2GE +1VOIP+Dual band WiFi+
HDMI XPON ONU
Product Specification



Product Overview

BT-GB720 model ONU is a user terminal device independently developed by BTPT in line with such industrial background. The device has built-in two-layer switching function and three-layer routing function. With compact structure and small appearance, it is a kind of FTTH optical network unit with high performance and low power consumption, which is very suitable for the application requirements of various data services in FTTH networking scenarios of various operators. BT-GB720 is an XPON product that can be adapted to EPON and GPON networks without replacing equipment and firmware.

Product Specifications

| Essential Parameter | |
|----------------------------------|---|
| Chip scheme | H618+RTL9607C |
| STB CPU | Quad-core Arm Cortex-A53 processor at @ 1.5GHz |
| STB GPU | Arm Mali-G31 MP2 GPU |
| STB OS (Operating system) | Android 12.0 |
| STB Memory | DDR3 4G |
| STB Flash | eMMC 5.1 16G/32G/64G/128G |
| PON | |
| Speed | GPON uplink rate: 1.25 Gbps Downlink rate: 2.5 Gbps EPON uplink rate: 1.25 Gbps Downlink rate: 1.25 Gbps |
| Interface standard | ITU-T G.984.2/ITU-T G.984.3/ITU-TG.988 Class B+ |
| TX Optical power | Min: 0 dBm Max: + 5 dBm |
| Receiving sensitivity | -27dBm |
| Receive saturation | -8dBm |
| Transmission distance | 0~20km |
| Service port | |
| PON port | 1 GPON /EPON Port |
| Ethernet port | 2 GE |
| Audio and video output interface | 1 HDMI 1.4 |
| USB port | 2 * USB 2.0 |
| Wireless interface | IEEE 802.11 b/g/n /ac wireless LAN |
| Antenna specifications | 4*External antenna, 5 DBI |


| Environmental parameter | |
|---|--|
| Storage environment | Temperature-10 to 70°C, relative humidity of 10-90% (non-condensation) |
| work environment | Temperature 0 to 45°C, relative humidity 10-90% (non-condensation) |
| Power supply and power consumption | |
| Power supply | Power input: 100 to 240 V AC, 50 / 60 Hz; power output: 12 V, 1A.5 |
| Product power consumption | ≤15W |
| Size weight | |
| Product size | 264mm x 170mm x 55mm (length, width and height) |
| Weight (net weight) | 300g |
| ONU software features | |
| PON characteristic | <ul style="list-style-type: none"> • Support for EPON / GPON self-adaptation • Follow IEEE 802.3ah, Specification, CTC, and ITU-TG.984 The GPON standard protocol, • GPON:8 T-CONTs,32 GEM Ports • Support the upstream and downstream FEC (Forward Error Correction) function • Support for a priority-level queue based on GEM port and T-CONT • Support power outage alarm • Support multicast/multicast |
| Ethernet features | <ul style="list-style-type: none"> • Ethernet self-negotiation and MDI / MDIX automatic monitoring • Support for 802.1D&802.1ad bridging, 802.1p Cos,802.1Q VLAN • Support for entry and exit rate limits • Support port isolation • Data filtering function, such as VLAN tag processing, flow grading, and package filtering function |
| Gateway features | <ul style="list-style-type: none"> • WAN port supports routing and bridging modes • The Router mode supports PPPoE / DHCP / static IP, etc • Support for Internet, VoIP, IPTV, TR 069 and other services • Support IPv4, IPv6 and IPv4/IPv6 • The LAN port supports the DHCP and the static IP mode • Support for NAT and NAPT resolution |
| Group broadcast | <ul style="list-style-type: none"> • Support for IGMP v1 / v2 / v3, IGMP proxy, and snooping • Support for MLD v1 / v2 proxy and snooping |
| Qos | <ul style="list-style-type: none"> • Supports 802.1p priority queue scheduling • Support for the SP scheduling algorithm |

| | |
|----------------------------|--|
| VoIP | <ul style="list-style-type: none"> • support SIP • support DTMF • support G.711a/G.711u/G.722/G.729 Voice encoding • Support for echo cancellation / voice activation detection / soft noise generation / DTMF Relay function • support T.30/T.38 Fax mode • Support for telephone line testing based on GR-909 |
| Firewall | <ul style="list-style-type: none"> • Guard against DDOS virus attack, support IP / MAC / URL based package filtering function |
| Wireless features | <ul style="list-style-type: none"> • 2.4G WLAN: Maximum rate 300Mbps • 5.8G WLAN: Maximum rate 866Mbps • Support for IEEE 802.11 b / g / n / ac wireless LAN • 2.4 GHz working frequency band: 2400 - 2483.5 MHz • 5.8GHz working frequency band 5180 - 5825 MHz • Support WEP, WPA-PSK, WPA 2-PSK and other encryption modes |
| Management features | <ul style="list-style-type: none"> • Support for Huawei, ZTE and Baitong OLT configuration ONU DHCP / PPPOE wan • Support the Baitong OLT management configuration ONU wan configuration, WiFi configuration • Supports remote access to the onu management web pages • Following the TR-069 management protocol • Follow the TR-098 and TR-140 terminal management interface • Supports remote upgrading of the ONU firmware through TR069 and OLT • Support alarm, performance monitoring and other functions |
| IPTV characteristic | |
| Video decoding | <ul style="list-style-type: none"> • H.265/HEVC Main/Main 10 profile@level 5.1 high-tier • H.264/AVC BP/MP/HP@level 5.1, H264/AVC MVC • VP6/VP8/VP9/ MPEG1/MPEG2 /MPEG4/ • Support 4Kx2K decoding 1080p@60fps/ 2x1080p@30fps/ 4x720p@30fps simultaneous encoding |
| Video resolution | <ul style="list-style-type: none"> • 1080p, 1080i, 720p, 720i, 480p, 480i |
| Voice decoding | <ul style="list-style-type: none"> • MPEG L1/L2 • AAC-LC and HE AAC V1/V2 decoding • APE, FLAC, OGG, AMR-NB, and AMR-WB decoding • G.711(u/a) audio decoding • G.711(u/a), AMR-NB, AMR-WB, and AAC-LC encodin |
| Image processing | JEPG, BMP, GIF, TIF, PNG |

| | |
|--------------------------|-----------------------------------|
| IHDMI interface standard | HDMI 1.4 |
| Screen resolution | Adaptive, 16:9,4:3, etc |
| Software upgrading | It can be upgraded via a USB disk |
| Operating system | Android 12.0 |
| Infrared control | Support, 10 meters |

Interface

Compatible with OLT Huawei/ZTE/Fiberhome

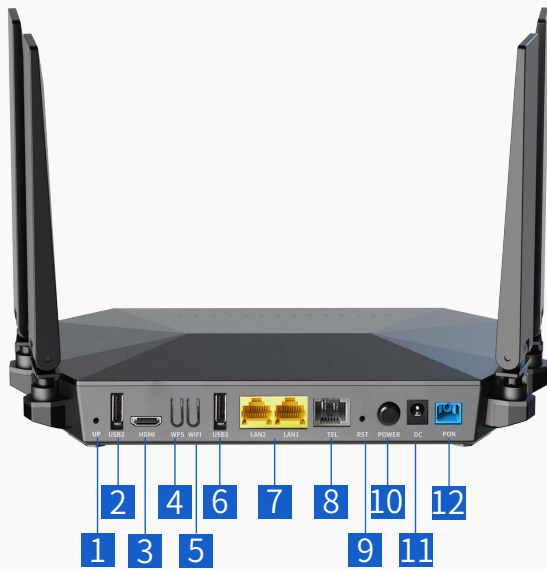


- 1 UP
- 2 USB2
- 3 HDMI
- 4 WPS
- 5 WIFI
- 6 USB1
- 7 LAN
- 8 TEL
- 9 RST
- 10 POWER
- 11 DC
- 12 PON

Networking application

Typical access scheme: FTTH

Typical services: broadband Internet access, WIFI

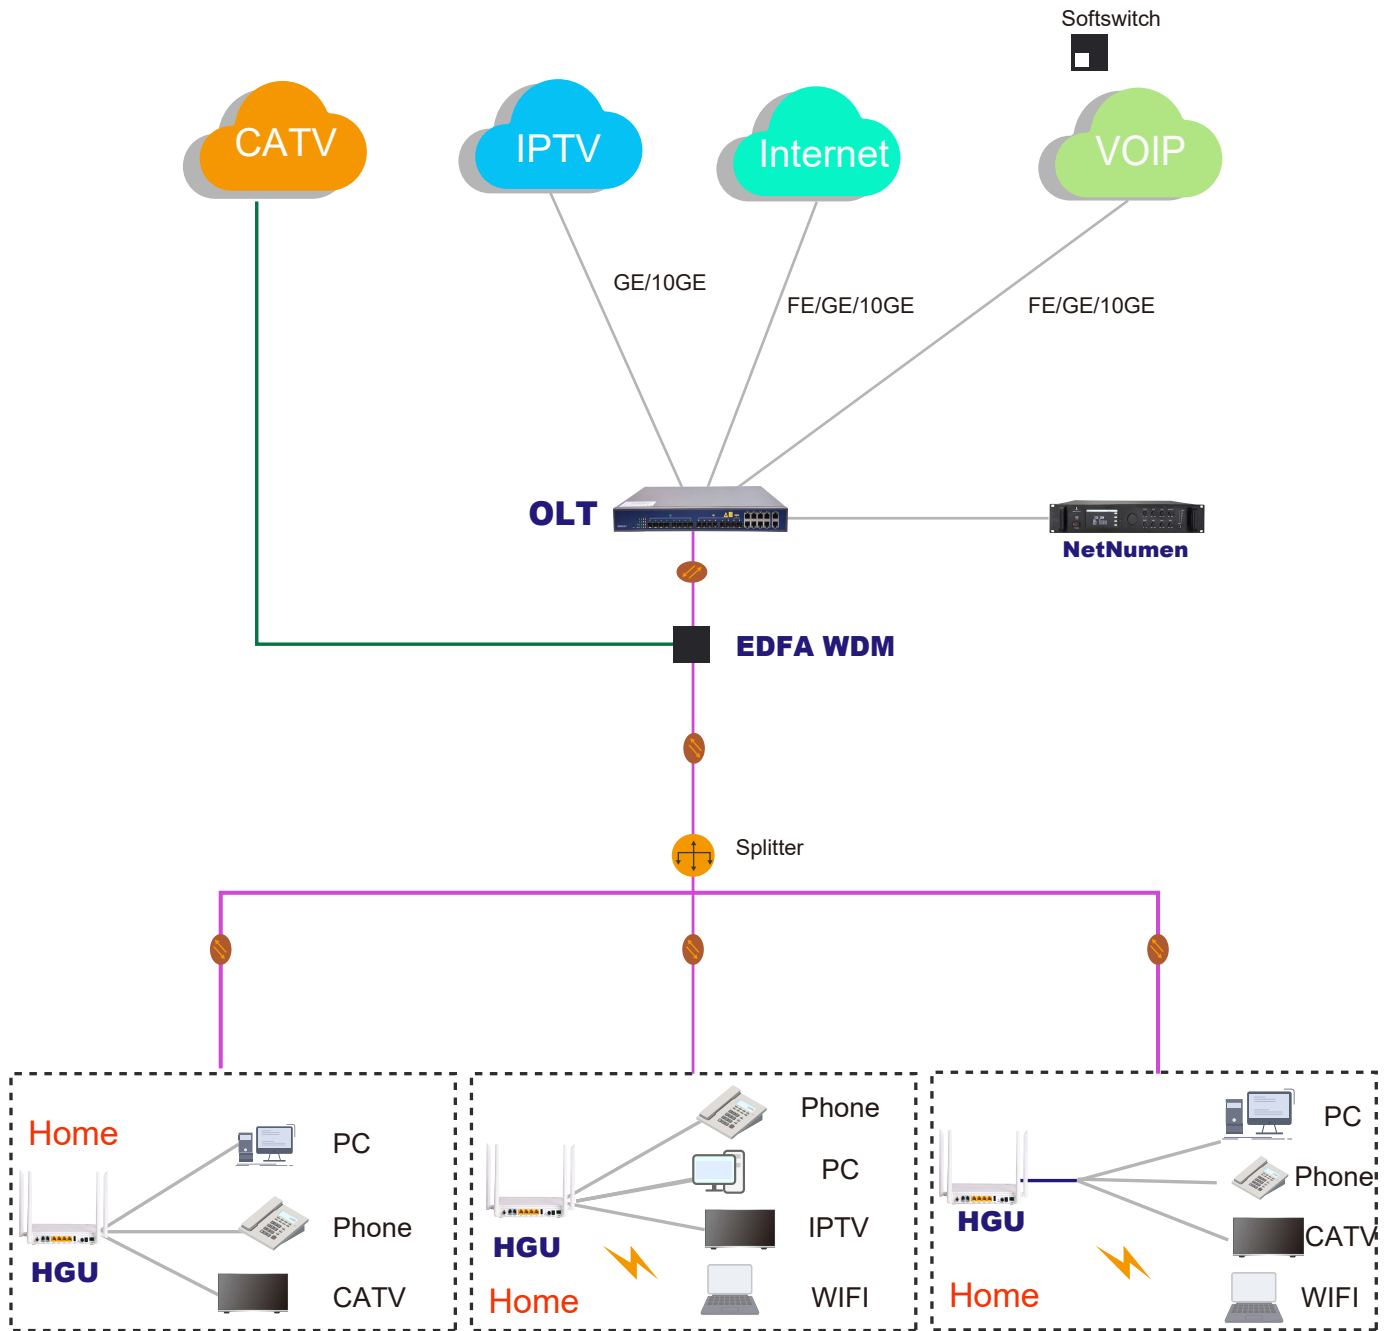

Shenzhen Baitong Putian Technology Co., Ltd.

3F, Building B, Honghua Technology Innovation Park, Longhua District, Shenzhen, China

marketing@bt-pon.com

www.bt-pon.com

<https://www.youtube.com/@btpon>

518000



Facebook



Website